

**8 June 2006**

## **C00702 Sydney Opera House – Northern Boardwalk Marquee Additional Loads**


The maximum allowable loads applied to the Marquee steel framework due to equipment (speakers, lighting, fixtures etc) are below:

1. Maximum 50 kg load can be hung directly under the bale ring masts.
2. Total maximum 100 kg load can be hung along the beam marked as B1 shown on attached sketch.
3. Maximum 20 kg load can be hung from retractable roof arch beams.
4. Maximum 100 kg loads can be hung from the beams marked as B2 and B3 shown on attached sketch.

Note:- Loads 1 – 4 can be applied at the same time.

Additional loads are not permitted on all other framing members.

Taiyo Membrane Corporation

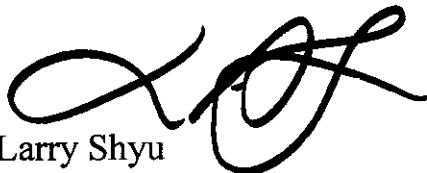

Larry Shyu  
Engineering / Project Manager

CO0702 - SK1  
08/06/06 JJJ

